

SLC-160C

Color 22X Zoom Camera

security labs

Features

- Camera type: 1/3" Color Super HAD CCD
- Video: NTSC, composite 1V p-p, 75 ohm
- Light sensitivity: 0.02 to 1 LUX
- Iris: auto electronic w/ AGC
- Resolution: 420 lines
- Lens: 3.9 to 85.8mm (22X zoom)
- Automatic and manual focus
- Power: 12VDC
- Size: 2.5" (H) x 2.5" (W) x 3.5 (D)
- Day-night function for low light level viewing
- OSD menu commands and set-up
- RS-485 communication

Camera kit includes:

- 50' of CAT 5 cable for video
- (2) UTP video baluns
- (1) 12VDC power supply




SLC-160C 22X Optical Zoom Camera


Put the PTZ feature on your DVR to work. Motorized optical zoom and focus are controlled via CAT5 cable (included) from the two wire RS485 connection on any (Pelco D or Pelco P). Crystal clear optical zoom out performs any digital zoom system on the market! See details of license plates, money transactions, or faces from many feet away.

The included power supply is installed near the camera. Video and control signals are efficiently sent over CAT5 type twisted pair cable up to 1,000 feet away. Video baluns and 50 feet of CAT5E cable are included to get you up and running immediately.

View and control camera zoom feature over the internet with optional 1010 web server or an internet ready DVR.

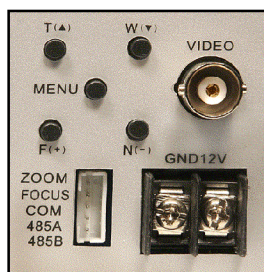

Zoom and focus controls are easily accessible from the rear of the camera or remotely via RS485.

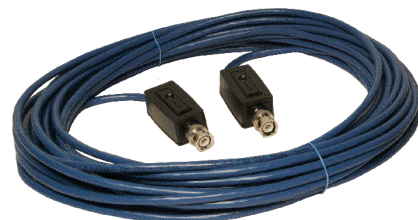

Included are UTP video baluns and 50' of CAT 5 twisted pair cable. Video can be run up to 1000' using the baluns.